

## **SPECIFICATIONS**

Input Voltage Input Power LED Color

Raw Lumens Waterproof

Operating Temperature


**DC 12V** 

Max 2.4Watts per pod 12pcs - White per pod 550 LM (4 Pods Combined)


IP68 (Only Pod)

-5°F - 120°F


# MAIN COMPONENTS

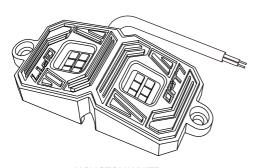

4 X PHOTON WHITE ROCK LIGHT POD



4 X VHB DOUBLE SIDED ADHESIVE TAPE



8 X HIGH QUALITY MAGNETS



**16 X MOUNTING SCREWS** 




30 X ZIP-TIE




# INSTALLATION

### STEP 1

Inspect kit to ensure all contents was included. Then decide where to locate the control box and ensure wiring has enough length for the rock lights to be installed in the desired location.

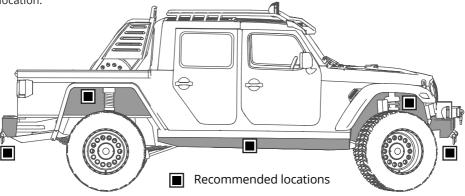

### **OPTION METHODS**

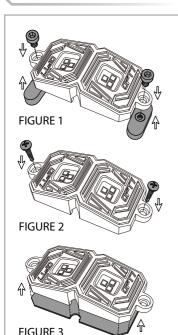

There are 3 installation methods, you can refer to the following methods to install and choose the best method for your vehicle.

#### OPTION 1

Use "Strong Magnets" for mounting as shown in Fig. 1

#### OPTION 2

Use "Self-Drilling Screws" for mounting as shown in Fig. 2

#### OPTION 3

Use "VHB Double-Sided Adhesive" for mounting as shown in Fig. 3


#### **IMPORTANT**

- Before starting installation ,we recommend that all rock light pods be checked to ensure that all functions are working properly.
- 2. Avoid hot surfaces and / or moving parts.





Find a constant 12-volt power source to power the rock lights. For details refer to the instructions below:

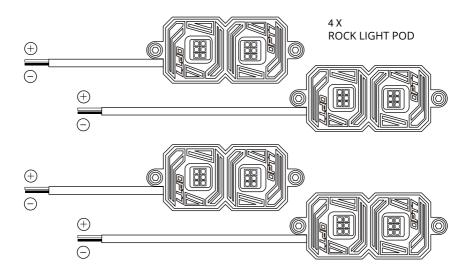

- Connect the positive(+) wire to the positive post (+) of the battery.
- Connect the negative(-) wire to the negative post (-) of the battery or to a common Ground location.


## **A** CAUTION

- 1. Start installing the LED Pods onto your vehicle. If any excess wiring are exposed during installation process, you must use the zip-ties to securely tie them together and tuck the wire into the junction area to avoid snagging or damage wires.
- 2. Rock Light Pods become extremely hot during use-keep away from any vehicle parts that may be damaged by exposure to high temperatures.
- 3. Avoid installation areas of the engine bay + heated surfaces.



## OPTION

## OPT7 ROCK LIGHTS 5 PIN ON/OFF ROCKER SWITCH WITH JUMPER WIRES

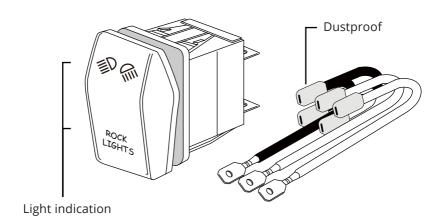

## EASY TO CONTROL

OPT7 Rock Lights 5-Pin ON/OFF Rocker Switch with Jumper Wires are designed to turn on/off the Photon Rock Lights easier.

Light Indication Design: Easy to operate and locate in plain sight or darkness. Dustproof Design: Avoid dust cluttering rocker switch

Buy it now only on OPT7 Lighting!





If you are uncomfortable performing work of this nature yourself, then do not hesitate to consult a professional for help. Working with a vechicle's electrical system can be hazardous to an unqualified individual. OPT7 is not liable for damages or personal injuries while installing this product. The installation guide is provided as assistance to reduce set up time.

# DISCLAIMER

