


DODGE CHALLENGER 08-23


INSTALLATION GUIDE




COMPONENTS

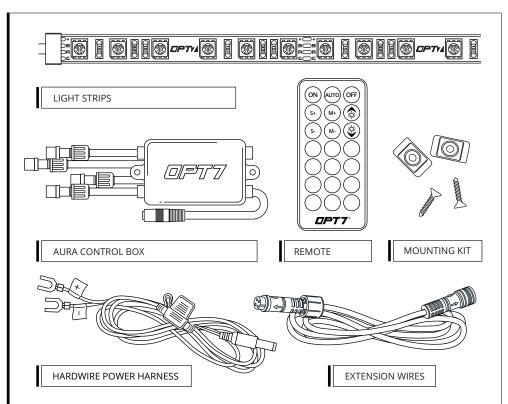


INSTALLATION



Open the hood.




Run the wires along the front brace and connect to the control box.




Wrap the LED strip into a circle shape and firmly press into place inside of the intake hole to secure.


secure.




Attach the strip as pictured as an alternate method of install.



Connect the power wire harness to your vehicle battery.



Remove the plastic covers on the right and left side of the engine bay.




Test for function.







EXAMPLE

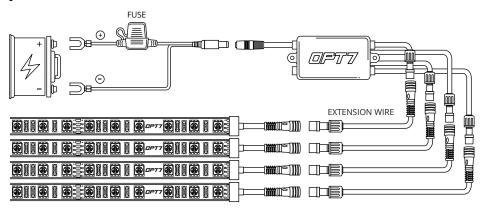



- Connecting to more than 10 AMP will override the kit and cause early failure, ensure it is 10 AMP or less!!
- 2. Please ensure that the LED bars or strips/control box/wiring all are mounted in areas where will not exceed 85°C or 185°F.

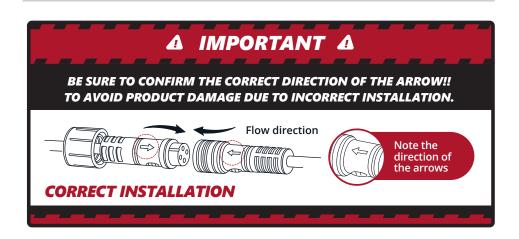



STEP 4

Using the included E-Z Remote, select your desired color or pattern.

- 1 Power-ON
- 2 Automatic Color Change
- 3 Power-OFF
- 4 Speed +/- 8 Levels
- 5 Mode +/- 19 Mode
- 6 Dimmer 8 Levels
- 7 Color Selection 12 Colors

DISCLAIMER

OPT7 Lighting is not liable for damages or personal injuries while installing this product. The Installation Guide is intended as assistance to reduce setup time. OPT7 Lighting assumes no responsibility for improper installation. If you are unfamiliar with your vehicle or inexperienced with aftermarket upgrades, please seek professional assistance.

OPT7 recommends installation for safety and guidance.

Modified installations or installation recommendations not specified by OPT7 Lighting will void product warranty.

