


WHERE TO INSTALL

RECOMMENDED LOCATIONS FOR ROCK LIGHT PODS



INSTALLATION STEPS

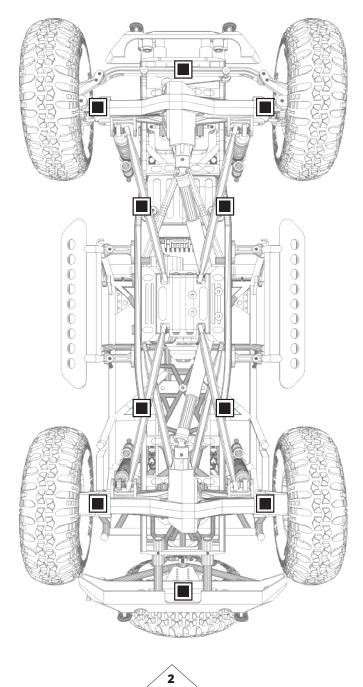

- 5/32-inch Drill Bit
- 7/64-inch Drill Bit
- · Phillips Head Screwdriver
- Designate your mounting locations for each Rock Light Pod and the control box. (Refer to page 2 for recommended mounting locations)
 Avoid hot surfaces and/or moving parts.
- 2. Use a pen to mark the holes where you want to mount the Rock Light Pods. Then, drill a 5/32" hole(s) for the wire connector to pass through.
- 3. Drill a 7/64" hole for each marked hole.
- 4. Secure the Rock Light Pods using the included screws. (If mounting on a rounded or uneven surface, utilize the optional rubber mounting pads.)

Caution: Rock Light Pods become extremely hot during use - keep away from any vehicle parts that may be damaged by exposure to high temperatures.

- 5. Connect all Rock Light Pod wires to the control box connectors. Secure by twisting.
- 6. Connect the Red line(+) of power hareness to the vehicle battery's positive terminal .
- 7. Connect the Black line (-) of power hareness to the vehicle battery's negative terminal or an unpainted area on your vehicle's frame.

Optional: If you would like for the door assist function to be used, it is recommended to connect the door assist wire from the control box to a positive (+) light source that is turned on when the door is open or to the dome light. This will activate the Rock Lights to be ON when the door is turned on.



AUX WIRING FOR A DOOR/DOME LIGHT

Please scan to see a detail instruction on Door Assist Sync or go to https://wintis.ladesk.com/549690-AURA-Door-AssistAUX-Installation-Guide

8. Open the OPT7 CONNECT App, pair your smart device to the control box, and pick your desired color!

3



- 1. Connecting to more than 10 AMP will override the kit and cause early failure, ensure it is 10AMPs or less!!
- 2. Please ensure that the LED bars or strips/control box/wiring all are mounted in areas where will not exceed 85° C or 185° F.



OPT7 CONNECT APP



- Colors
- Modes
- Door Assist
- Support
- Ability to control up to 4 devices at once



Download the free "OPT7 CONNECT" App

- App iOS (12+) available on App Store
- Android (6 +) available on Google Play

SPECIFICATIONS

Wattage	8W Per Pod
Amp Draw	8A
8 LEDs	Quad-Core CREE
Brightness	1,600 Lumens Per Pod
Voltage	12 V
Resistance	 IP68 Water-Resistant (Pod Only)
Operating Temperature	-20°-150°F



OPT7 Lighting is not liable for damages or personal injuries while installing this product. The Installation Guide is intended as assistance to reduce setup time. OPT7 Lighting assumes no responsibility for improper installation. If you are unfamiliar with your vehicle or inexperienced with aftermarket upgrades, please seek professional assistance.

OPT7 recommends installation for safety and guidance.

Modified installations or installation recommendations not specified by OPT7 Lighting will void product warranty.





Follow us on **Instagram** @opt7lighting

Subcribe to our **YouTube** channel. Opt7Lighting

